


Monitor your wideband, SCPC and Beacons remotely with the affordable RCM-2300C monitors. Your 1 MHz to 2500 MHz monitoring solution!!



DOMINION TEST INSTRUMENTS
Model RCM-2300C

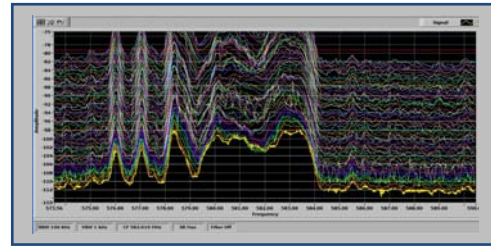

1 MHz – 2500 MHz Carrier Monitor

DTI's Remote Carrier Monitor products provide an economical solution for remote signal monitoring & analysis. Perfect for detecting and recording signal interference or verifying known signals from one or multiple remote locations. The RCM-2300C is an excellent solution for offsite troubleshooting, monitoring, and basic analysis.

Technical Specifications

Frequency Coverage:	1 MHz – 2500 MHz
Span Width:	0 - 500 MHz / Variable
Resolution Bandwidth:	3 MHz 1 MHz 300 kHz 100 kHz 10 kHz
RF Sensitivity:	Greater than - 100 dBm Typical
Reference Levels:	Selectable - 10 to - 60 dBm in 2, 5, or 10 dB steps
Scale:	2, 5, & 10 dB/Div selectable
Dynamic Range:	60 dB Logarithmic @ 10dB resolution per division on Application Window 40dB Logarithmic @ 5 dB resolution per division on Application Window 20dB Logarithmic @ 2 dB resolution per division on Application Window
Amplitude Accuracy:	+/- 1 dB typical
Frequency Accuracy	+/- 1 kHz typical
Input Connector:	BNC, 50 Ohm standard
Size:	1 Standard EIA Rack Unit 19" W x 1.75" H x 16" D
Power Requirements:	85 - 265 VAC 50/60 Hz
Display:	Windows based DTI Graphical User Interface

The RCM-2300C is the perfect solution for easy remote monitoring of carriers. (1 MHz to 2500 MHz) The Model 2300C monitors include the latest digital technology incorporating our new *digisweep* RF engine. The RCM-2300C is monitored in real time from a central location on your network, using a standard PC. You save time and money by allowing the Engineer or Technician to quickly monitor and troubleshoot a problem remotely without sending personnel to the site. This solution is "plug and play". The Ethernet RJ-45 port enables a network connection to the company's LAN/WAN or other IP network resource. The RCM-2300C provides an extremely flexible and cost-effective way to network-enable one or many RCM-2300C units and monitor them from a central location.

Features & Benefits

- Now supporting **LINUX** OS!
 - Comparative mask / template mode
 - Waterfall mode
 - Tuning and sweep accuracy w/ DIGISWEEP
 - Improved input sensitivity!
 - Email alerts / alarms to your Cell PDA or PC
 - Low profile 1RU rack mount design
 - Variable reference levels
 - Variable data point resolution
 - Center frequency tuning
 - Variable span width
 - Variable sweep rate / Single sweep mode
 - Video Bandwidth Filtering
 - Instant ZERO span
 - 5 resolution bandwidths 3 MHz to 10 kHz
 - Coupled and uncoupled RBW selection mode
 - Multiple input options
 - Waveform mask alarm feature
 - Ethernet ready, internet ready
 - Unlimited ability to save and recall user setups
 - Alarm triggered/event triggered recording
 - Playback with event cues
 - User defined averaging & mean filter features
- * contact DTI for your application

Applications


- Teleport Carrier Monitoring • Broadcast TV Stations
- Monitoring Oil Rig Data Carriers • Satellite News Gathering • Portable Fly-Aways
- Amateur Radio Applications

Specifications subject to change
©2009 Dominion Test Instruments, LLC

Optional Configuration & Accessories

RCM-2300C-2	2 RF Input
RCM-2300C-4	4 RF Input
RCM-2300C-6	6 RF Input

Switch isolation- 65 dB

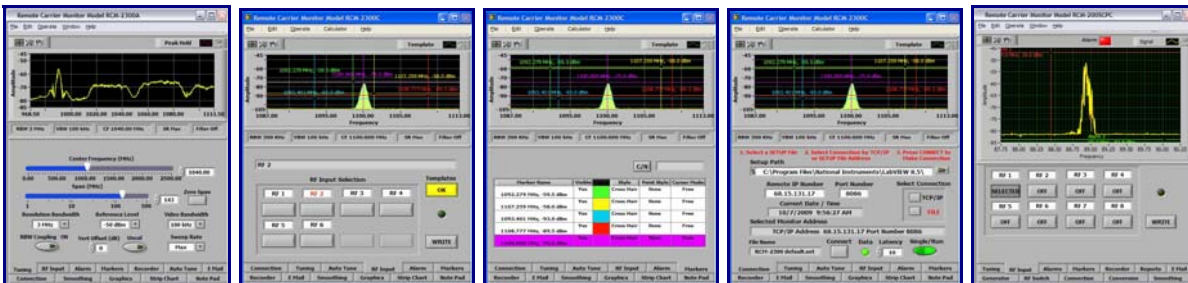



DOMINION TEST INSTRUMENTS


Model RCM-2300C

1 MHz – 2500 MHz Carrier Monitor

New 5.3.0.1 Control Additions!




Waterfall mode

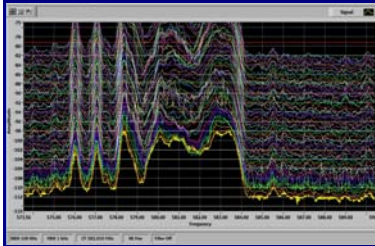

Standard analyzer mode only show a changing snapshot of the current signal RF energy, waterfall plots a scrolling spectrogram, a 2-d plot of frequency vs time. Waterfall plots are a convenient way of viewing a time history of your data. Each successive measurement record is plotted along the z-axis making it easy to see trends in the data.

Envelope Alarm

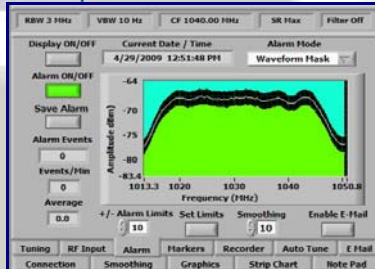

SENDS EMAILs to your PC or Phone / STARTS Event triggered recording

The alarm panel offers two alarm solutions, waveform mask (represented above) and the high / low limits option. The waveform mask option allows a user to select an exact envelope of concern around the signal of interest. The user can adjust and select the desired sensitivity by selecting and manipulating the +/- Alarm Limits control variable. Selecting a smaller or larger number will affect the monitor area around the signal. The high / low alarm function allows a user to select a box area to monitor. With either alarm scenario the alarm will activate the alarm visual indicators and if the user has selected the option will then either start a recording or send an email notification based on the criteria determined by the user.

Comparative Mask mode – allows a user to save & recall a sweep for comparison or analysis

Single Sweep mode – allows the user to select from standard sweep, variable sweep or single sweep mode for ultimate convenience

Variable datapoint Resolution – VDR allows the user to set the display point resolution allowing faster sweep rates

Waterfall mode - waterfall shows a scrolling spectrogram, a 2-d plot of frequency vs/ time.

Video Bandwidth Filter-The video bandwidth allows the user to select multiple video bandwidth filter settings / 10 Hz – 100 kHz

Variable Sweep Rate-The sweep rate feature allows the user to select various sweep rate settings / 0 – 10 Seconds

Instant Zero Span-One button activation for quick amplitude measurement

RBW Coupling-Selectable RBW coupling allows for optimum span setting / can be disabled for free span selection

IP Utility Toolbox-New IP toolbox for quick IP set up /configuration and network identification


Linux-Now supporting Linux OS.

Auto Tune Feature



Allows the user to define multiple setups of IP location, RF switch inputs, center frequency, reference level, span width etc... This is an excellent tool for monitoring both multiple locations (Remote Carrier Monitors / locations) and multiple RF inputs and center frequencies setups automatically. Allows up to 25 IP / locations and / or user defined setups.


Strip Chart / Log Utility

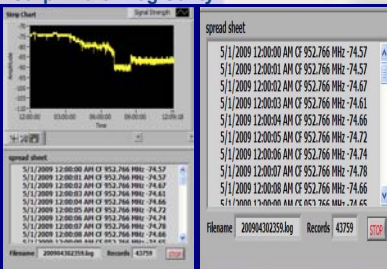

The strip chart panel allows a user to monitor the amplitude of a selected signal and display the amplitude on an amplitude vs. time strip chart. The user can then recall the data for analysis.

The Strip charting log utility allows for recording of center frequency amplitude. Events are recorded and presented on time based event chart. Additional logging feature allows for tab delimited file that can be imported into your favorite spreadsheet program. The log files can be automatically saved and restarted on a daily basis and pulled up later for review of signal performance.

Comparative mask & template mode

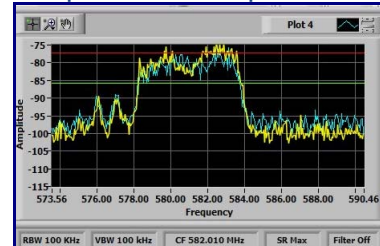

Allows the user to save and recall template Mask for easy signal comparison & verification.

Email alerts/ alarms to cell/PDA or PC



Software allows email alarms or alerts be sent instantly to notify the user of interference, loss of signal or any number of event triggered signal problems

Now Supporting Linux



With our latest release, DTI has added a LINUX option for those users who prefer LINUX OS.



Also we continue to offer our software in 2000, XP and Vista